WELDING · LASER CUTTING · EXTRACTION · FILTRATION

AZURE

DUST & FUME CONTROL FOR MODERN METALWORKING

From mobile extraction units to centralized filtration systems, AZURE provides practical dust and fume control solutions for welding, laser cutting and metal fabrication.

AZURE

Foshan Azure Era Intelligent Equipment Co., Ltd.
Website: www.azuremac.com
Email: sales@azuremac.com
Foshan, Guangdong, China

SCAN TO VISIT OUR WEBSITE

AZURE

INDUSTRIAL DUST & FUME EXTRACTION

Solutions for Welding, Laser Cutting & Metal Fabrication

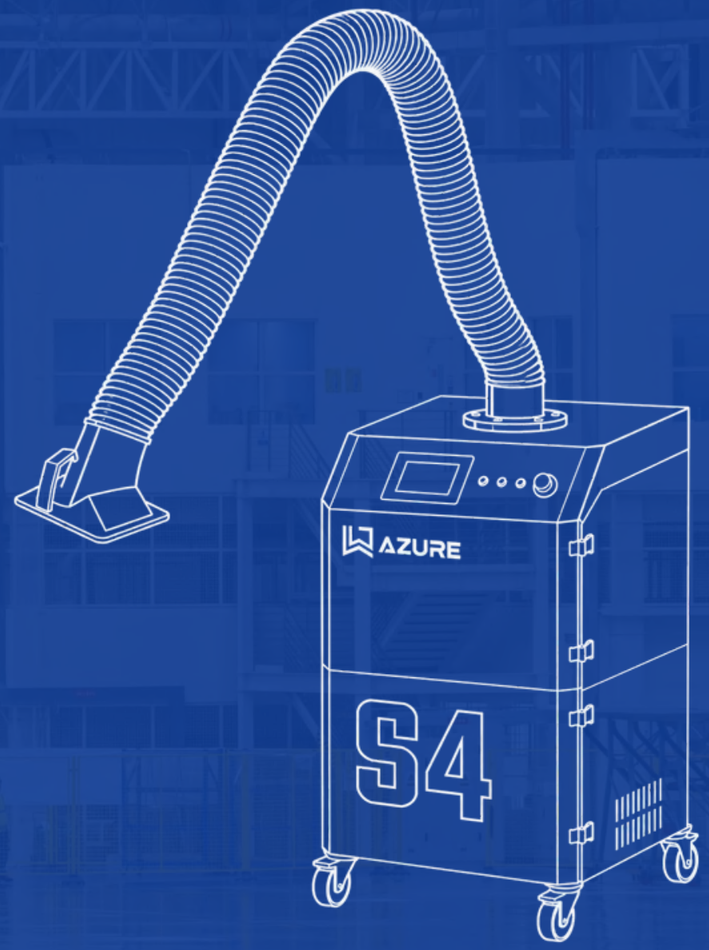

CLEANER AIR. BETTER PRODUCTION.

WELDING FUME CONTROL

Effective Fume Control Starts at **the Source**

Welding fumes should be captured as close to the source as possible. Proper capture design helps reduce unnecessary airflow, improve extraction efficiency, and keep contaminants from spreading through the workshop.

Capture First. Filter Second.

01
SOURCE CAPTURE

02
AIRFLOW CONTROL

03
EFFICIENT FILTRATION

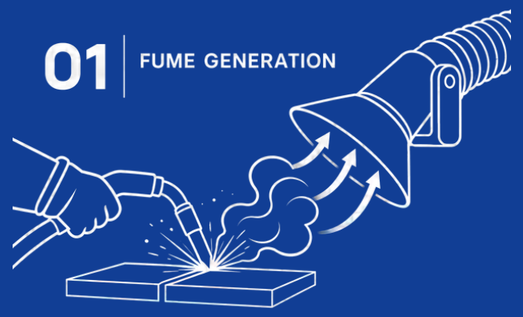

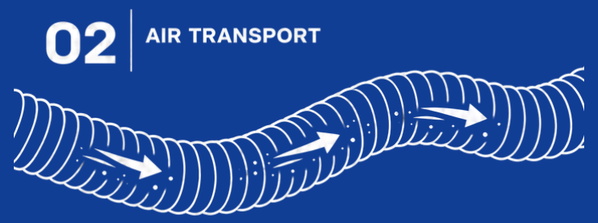

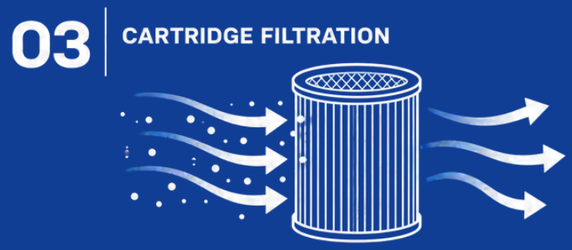

WELDING FUME EXTRACTION

APPLICATIONS

Designed For Professional Welding Environments

ROBOTIC WELDING FUME EXTRACTION SOLUTIONS

Source Capture For Cleaner Robotic Welding Environments

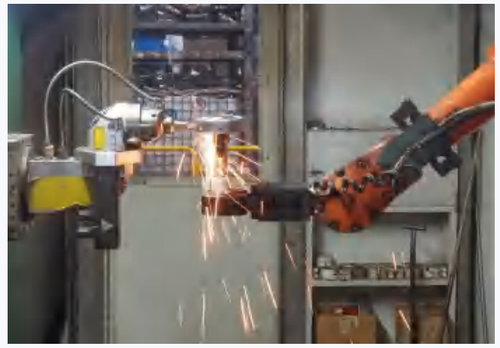

Welding Fume Extraction Solutions

From Individual Workstations to Centralized and Automated Systems

CENTRALIZED EXTRACTION SYSTEM

Manual Welding

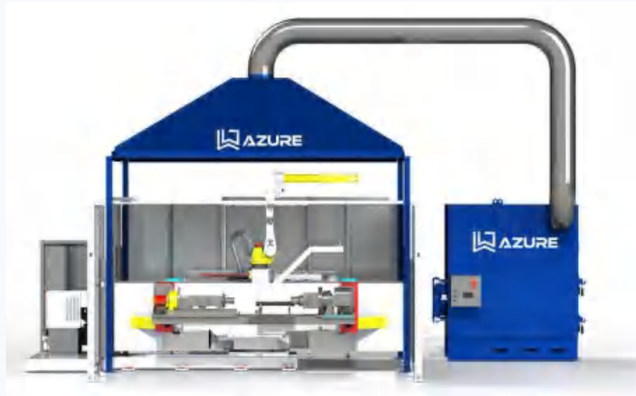

Robotic Welding

Flexible extraction for multi-station welding environments.

S1-X12

Compact Mobile Welding Fume Extractor

Compact fume extraction solution for light-duty and intermittent welding.

01 Flexible Extraction Arm
2 / 3 m adjustable arm for localized fume capture

02 Multi-Stage Filtration
Spark screen + pre-filter + high-efficiency main filter

03 Compact Mobile Design
Easy mobility between welding stations

AZURE

AZURE ERA / PRODUCT SERIES

S1-X12

Technical Specification

Compact filtration solution for light-duty and intermittent welding applications.

GENERAL INFORMATION

MODEL S1-X12	DIMENSION 500 × 500 × 850 mm
ARM LENGTH 2 or 3 m / Ø160 mm	WEIGHT 75 kg

PERFORMANCE

AIRFLOW 1000m³/h	MOTOR POWER 0.75 kW
WORKING PRESSURE 1000 Pa	PRE-FILTER G4 Pre-Filter
MAIN FILTER F9 or E12 Optional	ACTIVATED CARBON 3.3 kg

SYSTEM & REQUIREMENT

POWER SUPPLY Custom Voltage	FILTER CONFIGURATION G4+F9+Activated Carbon
EXTRACTION METHOD Local Source Capture	RECOMMENDED APPLICATION Light-Duty & Intermittent Welding

S2-X12

High-Efficiency Mobile Welding Fume Extractor

High-efficiency fume extraction solution for regular and continuous welding.

01 Flexible Extraction Arm
2 / 3 m adjustable arm for localized fume capture

02 High-Efficiency Filtration
G4 pre-filter + F9 / H13 main filter options

03 Designed for Continuous Welding
Higher airflow for regular and continuous welding applications

AZURE

AZURE ERA / PRODUCT SERIES

S2-X12

Technical Specification

High-efficiency fume extraction solution for regular and continuous welding.

GENERAL INFORMATION

MODEL	S2-X12
DIMENSION	800 × 700 × 1150 mm
EXTRACTION ARM	2 or 3 m / Ø160 mm
WEIGHT	110 kg

PERFORMANCE

AIRFLOW	1400 m^3/h
MOTOR POWER	1.5 kW
WORKING PRESSURE	1500 Pa
PRE-FILTER	G4 Pre-Filter
MAIN FILTER	F9 or H13 Optional
FILTER AREA	25 m^2

SYSTEM & REQUIREMENT

POWER SUPPLY	Custom Voltage
FILTER CONFIGURATION	G4 + F9 / H13
EXTRACTION METHOD	Local Source Capture
RECOMMENDED APPLICATION	Regular & Continuous Welding

S2-X22

High-Efficiency Dual-Arm Welding Fume Extractor

High-efficiency fume extraction solution for two welding stations operating simultaneously.

01 Dual Flexible Extraction Arms
Two 2 / 3 m adjustable arms for simultaneous source capture

02 High-Efficiency Filtration
G4 pre-filter + F9 / H13 main filter options

03 Designed for Dual-Station Welding
2200 m^3/h total airflow for simultaneous welding operations

AZURE

AZURE ERA / PRODUCT SERIES

S2-X22

Technical Specification

High-efficiency fume extraction solution for regular and continuous welding.

GENERAL INFORMATION

MODEL S2-X22	DIMENSION 800 × 700 × 1150 mm
EXTRACTION ARM 2 × 2 or 3 m / Ø160 mm	WEIGHT 130 kg

PERFORMANCE

AIRFLOW 2200 m^3/h	MOTOR POWER 2.2 kW
WORKING PRESSURE 1700 Pa	PRE-FILTER G4 Pre-Filter
MAIN FILTER F9 or H13 Optional	FILTER AREA 35 / 40 m^2

SYSTEM & REQUIREMENT

POWER SUPPLY Custom Voltage	FILTER CONFIGURATION G4 + F9 / H13
EXTRACTION METHOD Dual Source Capture	RECOMMENDED APPLICATION Dual-Station Welding

S3-X12

Single-Arm Activated Carbon Welding Fume Extractor

Multi-stage fume filtration with activated carbon for welding applications with odors.

01 Flexible Extraction Arm
2 / 3 m adjustable arm for localized fume capture

02 Multi-Stage Filtration
G4 pre-filter + F9 / H13 main filter

03 Activated Carbon Filtration
12 kg activated carbon for odor control

AZURE

AZURE ERA / PRODUCT SERIES

S3-X12

Technical Specification

Activated carbon filtration solution for welding fumes with odors and gaseous contaminants.

GENERAL INFORMATION

MODEL S3-X12	DIMENSION 800 × 700 × 1350 mm
EXTRACTION ARM 2 or 3 m / Ø160 mm	WEIGHT 140 kg

PERFORMANCE

AIRFLOW 1400 m^3/h	MOTOR POWER 1.5 kW
WORKING PRESSURE 1800 Pa	PRE-FILTER G4 Pre-Filter
MAIN FILTER F9 or H13 Optional	ACTIVATED CARBON 12 kg

SYSTEM & REQUIREMENT

POWER SUPPLY Custom Voltage	FILTER CONFIGURATION G4 + F9 / H13 + Carbon
EXTRACTION METHOD Local Source Capture	RECOMMENDED APPLICATION Welding with Odors

S3-X22

Dual-Arm Activated Carbon Welding Fume Extractor

Multi-stage fume filtration with activated carbon for dual-station welding applications with odors.

01 Dual Flexible Extraction Arms
Two adjustable arms for simultaneous source capture

02 Multi-Stage Filtration
G4 pre-filter + F9 / H13 main filter

03 Activated Carbon Filtration
Activated carbon stage for welding fume and odor control

AZURE

AZURE ERA / PRODUCT SERIES

S3-X22

Technical Specification

Dual-arm filtration solution with activated carbon for welding fumes and odors.

GENERAL INFORMATION

MODEL S3 - X22	DIMENSION 800 × 700 × 1350 mm
EXTRACTION ARM 2 × 2 or 3 m / Ø160 mm	WEIGHT 160 kg

PERFORMANCE

AIRFLOW 2200 m^3/h	MOTOR POWER 3 kW
WORKING PRESSURE 2000 Pa	PRE-FILTER G4 Pre-Filter
MAIN FILTER F9 or H13 Optional	ACTIVATED CARBON 12 kg

SYSTEM & REQUIREMENT

POWER SUPPLY Custom Voltage	FILTER CONFIGURATION G4 + F9 / H13 + Carbon
EXTRACTION METHOD Dual Source Capture	RECOMMENDED APPLICATION Dual-Station Welding with Odors

S4-X12

Cartridge Welding Fume Extractor

High-efficiency cartridge filtration for intermittent and medium-duty welding applications.

01 Flexible Extraction Arm
2 m / 3 m adjustable arm for localized fume capture

02 PTFE Cartridge Filtration
Flame-retardant PTFE membrane cartridge for fine fume filtration

03 Automatic Pulse Cleaning
Automatic filter cleaning for longer cartridge service life

AZURE

AZURE / PRODUCT SERIES

S4-X12

Technical Specification

High-efficiency cartridge filtration solution for intermittent and medium-duty welding.

GENERAL INFORMATION

MODEL S4 - X12	DIMENSION 800 × 650 × 1350 mm
EXTRACTION ARM 2 or 3 m / Ø160 mm	WEIGHT 120 kg

PERFORMANCE

AIRFLOW 1100 m^3/h	MOTOR POWER 1.5 kW
WORKING PRESSURE 1600 Pa	PRE-FILTER G4 Pre-Filter
MAIN FILTER PTFE Cartridge	FILTER AREA 15 m^2

SYSTEM & REQUIREMENT

POWER SUPPLY Custom Voltage	FILTER CONFIGURATION G4 + PTFE Cartridge
CLEANING SYSTEM Automatic Pulse Cleaning	RECOMMENDED APPLICATION Intermittent & Medium-Duty Welding

S4-X22

Dual-Arm Cartridge Welding Fume Extractor

High-efficiency cartridge filtration for simultaneous dual-station welding.

01 Dual Flexible Extraction Arms
Two 2 or 3 m adjustable arms for simultaneous source capture

02 PTFE Cartridge Filtration
Flame-retardant PTFE membrane cartridges for fine fume filtration

03 Automatic Pulse Cleaning
Automatic filter cleaning for longer cartridge service life

AZURE

AZURE / PRODUCT SERIES

S4-X22

Technical Specification

High-efficiency cartridge filtration for simultaneous dual-station welding.

GENERAL INFORMATION

MODEL S4 - X22	DIMENSION 800 × 800 × 1350 mm
EXTRACTION ARM 2 × 2 or 3 m / Ø160 mm	WEIGHT 170 kg

PERFORMANCE

AIRFLOW 2200 m^3/h	MOTOR POWER 2.2 kW
WORKING PRESSURE 1800 Pa	PRE-FILTER G4 Pre-Filter
MAIN FILTER PTFE Cartridge	FILTER AREA 30 m^2

SYSTEM & REQUIREMENT

POWER SUPPLY Custom Voltage	FILTER CONFIGURATION G4 + PTFE Cartridge
CLEANING SYSTEM Automatic Pulse Cleaning	RECOMMENDED APPLICATION Dual-Station Welding

AE-WFE-W11

Single Arm Wall-Mounted Fume Extractor

Space-saving welding fume extraction solution for
fixed welding stations.

APPLICATION

KEY FEATURES

01 Space-saving Wall Installation
Optimized layout for fixed welding stations.
02 Flexible Extraction Arm
Precise fume capture at welding points.
03 Flame Retardant Filtration
Safe and efficient welding fume filtration.



AZURE ERA / PRODUCT SERIES

AE-WFE-W11

Technical Specification

Efficient wall-mounted extraction solution designed for fixed welding stations.
.

GENERAL INFORMATION

MODEL AE-WFE-W11	DIMENSION 700 × 650 × 1150 mm
ARM LENGTH 3m	WEIGHT 105 kg

PERFORMANCE

AIRFLOW 2000m³/h	MOTOR POWER 1.5 kW
FILTER CARTRIDGES 1 PCS	FILTER MATERIAL Flame Retardant Polyester
FILTRATION ACCURACY ⩾99.9% @ 0.3 μm	CLEANING SYSTEM Automatic Pulse Cleaning

SYSTEM & REQUIREMENT

POWER SUPPLY 380V / 50Hz / 3PH	COMPRESSED AIR REQUIREMENT 0.5 – 0.7 MPa
NOISE LEVEL ⩽75 dB	

AE-WFE-W22

Dual Arm Wall-Mounted Welding Fume Extractor

Dual arm solution for efficient fume capture in continuous welding operations.

APPLICATION

KEY FEATURES

01 Dual Extraction Arms

Dual arms provide wider welding coverage.

02 Flexible Extraction Arm

INDEPENDENT ARMS ENABLE PRECISE FUME CAPTURE.

03 Flame Retardant Filter

Safe filtration for continuous welding operations.



AZURE

AZURE ERA / PRODUCT SERIES

AE-WFE-W22

Technical Specification

High efficiency dual-arm extraction solution for larger welding areas.

GENERAL INFORMATION

MODEL AE-WFE-W22	DIMENSION 900 × 750 × 1300 mm
ARM LENGTH 3m × 2	WEIGHT 165 kg

PERFORMANCE

AIRFLOW 2500m^3/h	MOTOR POWER 2.2 kW
FILTER CARTRIDGES 1 PCS	FILTER MATERIAL Flame Retardant Polyester
FILTRATION ACCURACY ⩾99.9% @ 0.3 μm	CLEANING SYSTEM Automatic Pulse Cleaning

SYSTEM & REQUIREMENT

POWER SUPPLY 380V / 50Hz / 3PH	COMPRESSED AIR REQUIREMENT 0.5 – 0.7 MPa
NOISE LEVEL ⩽75 dB	

AE-BX-1

Portable Welding Fume Extraction Workstation

Integrated downdraft extraction and filtration solution for clean and efficient welding operations.

APPLICATION

KEY FEATURES

01 Source Capture Design
Direct extraction captures welding fumes at the working surface.

02 PTFE High Efficiency Filtration
High-performance cartridge filter with ⩾99.9% filtration efficiency.

03 Spark & Slag Protection
Multi-layer protection design ensures safe welding operation.

AZURE

AZURE ERA / PRODUCT SERIES

AE-BX-1

Technical Specification

Compact welding fume extraction system with integrated cartridge filtration.

GENERAL INFORMATION

MODEL AE-BX-1	DIMENSION 1150 × 750 × 1500 mm
TABLE SIZE 1100 × 700 mm	WEIGHT 120 kg

PERFORMANCE

AIRFLOW 850m^3/h	MOTOR POWER 1.1 kW
FILTER CARTRIDGES 1 PCS	FILTER AREA 23 m^2
FILTRATION ACCURACY ⩾99.9% @ 0.3 μm	CLEANING SYSTEM Automatic Pulse Cleaning

SYSTEM & REQUIREMENT

POWER SUPPLY 380V / 50Hz / 3PH	COMPRESSED AIR REQUIREMENT 0.5 – 0.7 MPa
NOISE LEVEL ⩽75 dB	

G-DRY 15

Dry Downdraft Extraction Workstation

Heavy-duty downdraft workstation designed for grinding, cutting and welding applications with efficient source capture.

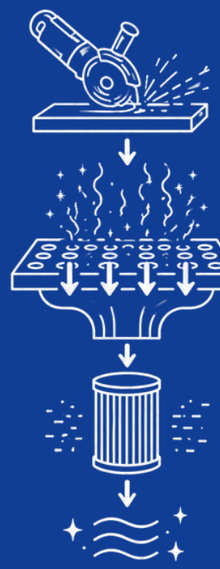

APPLICATION

KEY FEATURES

01 Powerful Downdraft Extraction
Direct dust and fume capture at the working surface.

02 Multi-Application Capability
For grinding, cutting, welding and finishing.

03 Spark Protection Design
Designed for safer processing of metal dust and welding applications.

AZURE

AZURE ERA / PRODUCT SERIES

G-DRY 15

Technical Specification

Professional downdraft workstation for industrial dust and fume extraction.

GENERAL INFORMATION

MODEL	G-DRY 15
DIMENSION	1500 × 1200 × 1600 mm
TABLE SIZE	1500 × 1000 mm
WORKING HEIGHT	850 mm

PERFORMANCE

AIRFLOW	3900-4600 m^3/h
MOTOR POWER	3 kW
FILTER CARTRIDGES	2 PCS
FILTER MATERIAL	PTFE Coated Polyester
FILTRATION ACCURACY	⩾99.9%
CLEANING SYSTEM	Automatic Pulse Cleaning

SYSTEM & REQUIREMENT

POWER SUPPLY	380V / 50Hz / 3PH
COMPRESSED AIR REQUIREMENT	0.5 – 0.7 MPa
NOISE LEVEL	⩽75 dB

WELDING FUME EXTRACTION COMPONENTS

Flexible extraction solutions for welding fume capture.

AZURE

AZURE ERA / PRODUCT SERIES

EXTRACTION COMPONENTS

Available in different sizes and configurations according to application requirements.

03

CARTRIDGE FILTRATION SYSTEM

ADVANCED DUST FILTRATION
FOR CLEANER INDUSTRIAL AIR

LASER CUTTING · WOODWORKING · COMPOSITES

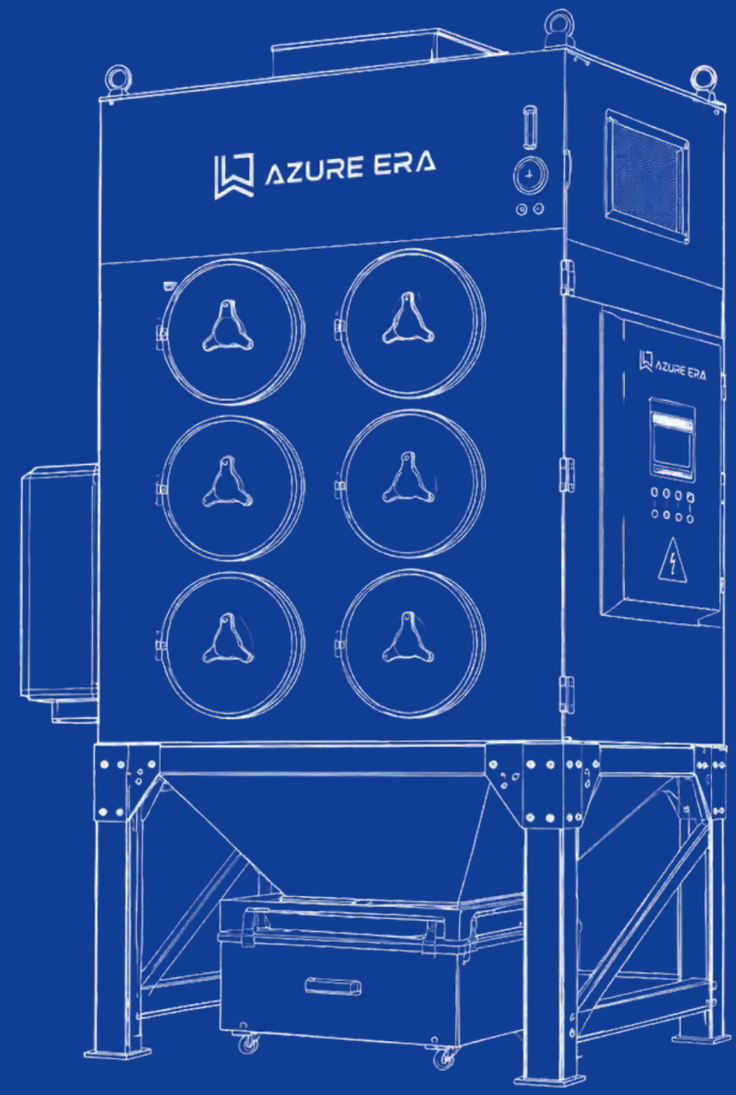

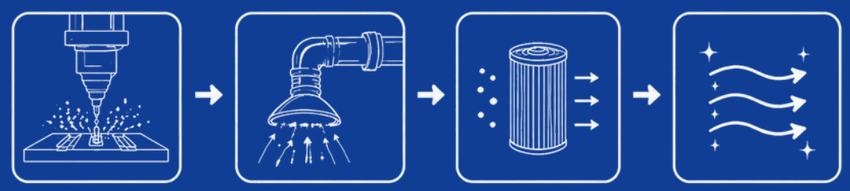

CARTRIDGE DUST COLLECTION

APPLICATIONS

Advanced filtration solutions for welding fumes, laser smoke, wood dust and industrial particles.

WELDING

TYPICAL APPLICATIONS

Dust collection solutions for various industrial applications.

LASER CUTTING

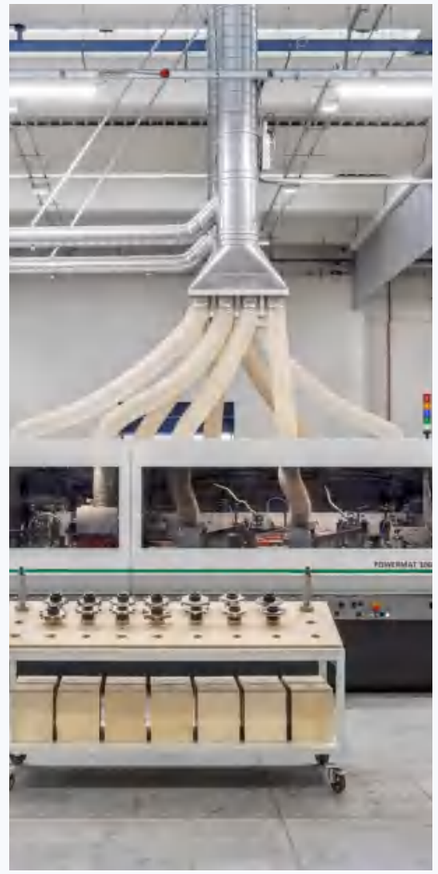

WOODWORKING

AE-LD-4

High Performance Cartridge Dust Collector

Industrial dust extraction solution with integrated spark protection.

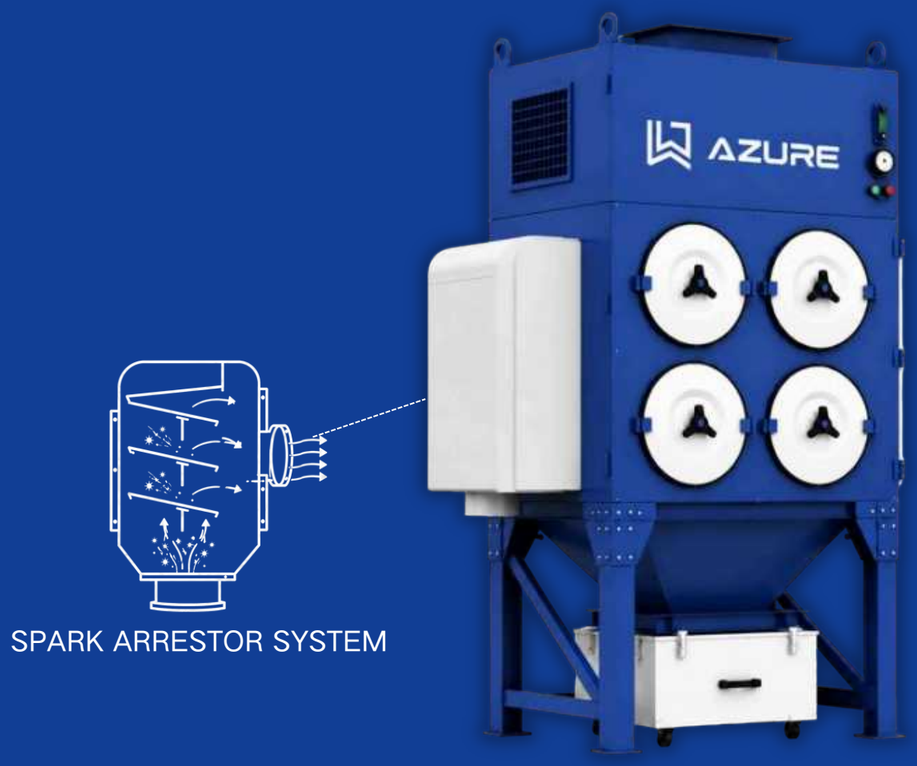

SPARK ARRESTOR SYSTEM

APPLICATION

KEY FEATURES

01 Flame Retardant PTFE Filtration
High efficiency filtration with excellent flame resistance and long service life.

02 Automatic Pulse Cleaning
Maintains stable airflow and reduces filter maintenance.

03 Spark Protection System
Multi-stage protection for safer industrial operation

AZURE

AZURE ERA / PRODUCT SERIES

AE-LD-4

ENGINEERING PARAMETERS

Designed for efficient dust extraction with reliable industrial performance.

GENERAL INFORMATION

MODEL AE-LD-4	DIMENSION 1300 × 1340 × 2200 mm
PRODUCT TYPE Fixed Cartridge Dust Collector	WEIGHT 600 kg

PERFORMANCE

AIRFLOW 5500m^3/h	MOTOR POWER 5.5 kW
FILTER CARTRIDGES 4 PCS	FILTER MATERIAL Flame Retardant PTFE
FILTRATION ACCURACY ⩾99.9% @ 0.3 μm	CLEANING SYSTEM Automatic Pulse Cleaning

SYSTEM & REQUIREMENT

POWER SUPPLY 380V / 50Hz / 3PH	COMPRESSED AIR REQUIREMENT 0.5 – 0.7 MPa
NOISE LEVEL ⩽75 dB	

AE-LD-6

6-Cartridge Industrial Dust Collector

High-performance dust extraction with integrated spark protection.

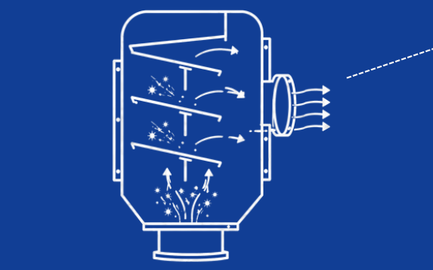

SPARK ARRESTOR SYSTEM

APPLICATION

KEY FEATURES

01 Six-Cartridge Filtration System
Higher filtration capacity for large-scale industrial applications.

02 Automatic Pulse Cleaning
Maintains stable airflow and extends filter service life.

03 Spark Protection System
Multi-stage protection reduces sparks entering the filtration chamber.

AZURE

AZURE ERA / PRODUCT SERIES

AE-LD-6

ENGINEERING PARAMETERS

Designed for efficient dust extraction with reliable industrial performance.

GENERAL INFORMATION

MODEL AE-LD-6	DIMENSION 1560 × 1430 × 2840 mm
PRODUCT TYPE Cartridge Fixed Dust Collector	WEIGHT 700 kg

PERFORMANCE

AIRFLOW 7500m³/h	MOTOR POWER 7.5 kW
FILTER CARTRIDGES 6 PCS	FILTER MATERIAL Flame Retardant PTFE
FILTRATION ACCURACY ⩾99.9% @ 0.3 μm	CLEANING SYSTEM Automatic Pulse Cleaning

SYSTEM & REQUIREMENT

POWER SUPPLY 380V / 50Hz / 3PH	COMPRESSED AIR REQUIREMENT 0.5 – 0.7 MPa
NOISE LEVEL ⩽75 dB	SPARK PROTECTION Integrated Spark Arrestor

AE-LD-4S

4-Cartridge Industrial Dust Collector

High-efficiency dust extraction solution for woodworking and industrial production.

APPLICATION

KEY FEATURES

01 High Efficiency Cartridge Filtration
Efficient filtration for fine dust particles and industrial applications.

02 Automatic Pulse Cleaning
Maintains stable airflow and extends filter service life.

03 Large Dust Collection Capacity
Designed for continuous operation in demanding industrial environments.

AZURE

AZURE ERA / PRODUCT SERIES

AE-LD-4S

ENGINEERING PARAMETERS

Designed for woodworking
and general industrial dust extraction.

GENERAL INFORMATION

MODEL AE-LD-4S	DIMENSION 1300 × 1340 × 2200 mm
PRODUCT TYPE Cartridge Fixed Dust Collector	WEIGHT 600 kg

PERFORMANCE

AIRFLOW 5500m^3/h	MOTOR POWER 5.5 kW
FILTER CARTRIDGES 4 PCS	FILTER MATERIAL PTFE Membrane
FILTRATION ACCURACY ⩾99.9% @ 0.3 μm	CLEANING SYSTEM Automatic Pulse Cleaning

SYSTEM & REQUIREMENT

POWER SUPPLY 380V / 50Hz / 3PH	COMPRESSED AIR REQUIREMENT 0.5 – 0.7 MPa
NOISE LEVEL ⩽75 dB	

AE-LD-6S

6-Cartridge Industrial Dust Collector

Reliable dust collection solution
for woodworking and industrial applications.

APPLICATION

KEY FEATURES

01 High Efficiency Cartridge Filtration
Efficient filtration for fine dust particles and industrial applications.

02 Automatic Pulse Cleaning
Maintains stable airflow and extends filter service life.

03 Large Dust Collection Capacity
Designed for continuous operation in woodworking environments.

AZURE

AZURE ERA / PRODUCT SERIES

AE-LD-6S

ENGINEERING PARAMETERS

Designed for woodworking
and general industrial dust extraction.

GENERAL INFORMATION

MODEL AE-LD-6S	DIMENSION 1560 × 1430 × 2840 mm
PRODUCT TYPE Cartridge Fixed Dust Collector	WEIGHT 600 kg

PERFORMANCE

AIRFLOW 7500m^3/h	MOTOR POWER 7.5 kW
FILTER CARTRIDGES 6 PCS	FILTER MATERIAL PTFE Membrane
FILTRATION ACCURACY ⩾99.9% @ 0.3 μm	CLEANING SYSTEM Automatic Pulse Cleaning

SYSTEM & REQUIREMENT

POWER SUPPLY 380V / 50Hz / 3PH	COMPRESSED AIR REQUIREMENT 0.5 – 0.7 MPa
NOISE LEVEL ⩽75 dB	

AE-HV-55

High Vacuum Welding Fume Extraction System

High vacuum source capture system designed for robotic welding applications.

APPLICATION

KEY FEATURES

01 High Vacuum Source Capture

Powerful suction captures fumes directly from welding torch.

02 Robotic Welding Integration

Designed for automated welding cells with robot interface.

03 Continuous Production Protection

Stable filtration performance for long-term robotic operation.

AZURE

AZURE ERA / PRODUCT SERIES

AE-HV-55

ENGINEERING PARAMETERS

Designed for high vacuum source capture in robotic welding applications.

GENERAL INFORMATION

MODEL AE-HV-55	DIMENSION 950 × 830 × 2030 mm
PRODUCT TYPE Robotic Fume Extractor	WEIGHT 250 kg

PERFORMANCE

AIRFLOW 530m^3/h	MOTOR POWER 5.5 kW
FILTER CARTRIDGES 2 PCS	FILTER MATERIAL Flame Retardant PTFE
FILTRATION ACCURACY ⩾99.9% @ 0.3 μm	CLEANING SYSTEM Automatic Pulse Cleaning

SYSTEM & REQUIREMENT

POWER SUPPLY 380V / 50Hz / 3PH	COMPRESSED AIR REQUIREMENT 0.5 – 0.7 MPa
NOISE LEVEL ⩽75 dB	SPARK PROTECTION Integrated Spark Arrestor

G-DT 15

Central Dust Extraction Workstation

Designed for centralized dust extraction systems, enabling multiple workstations to share one high-performance filtration unit.

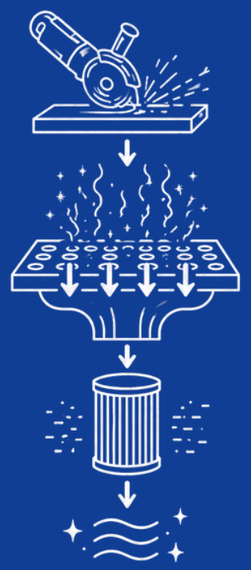

APPLICATION

KEY FEATURES

01 Central Extraction Integration
Connects directly to centralized dust collection systems.

02 Efficient Downdraft Capture
Captures dust and sparks directly from the working surface.

03 Heavy-Duty Working Structure
Robust steel construction for industrial applications.

AZURE

AZURE ERA / PRODUCT SERIES

G-DT 15

Technical Specification

Professional downdraft workstation designed for central dust extraction systems.

GENERAL INFORMATION

MODEL	APPLICATION
G-DT 15	Grinding / Cutting
TABLE SIZE	WORKING HEIGHT
1500 × 1000 mm	850 mm

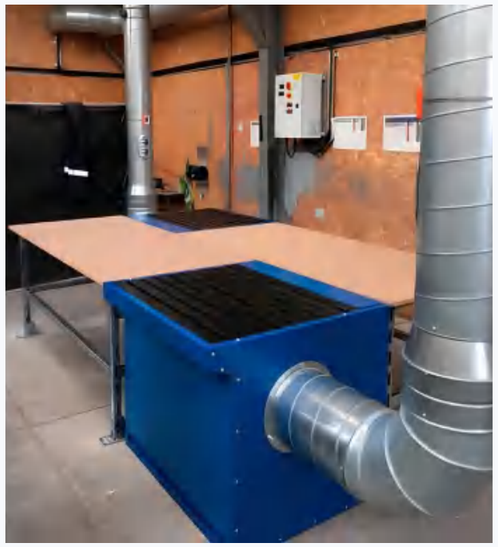

From single workstations to multi-point extraction networks, Azure provides flexible dust collection solutions for various industrial applications.

FILTER CARTRIDGE OPTIONS

Customized filter media for different industrial dust applications

PTFE Membrane Filter Cartridge

High efficiency filtration with excellent dust release performance.

MATERIAL

PTFE Membrane

DIAMETER

Ø325 mm / Ø350 mm

LENGTH

500 / 550 / 600 mm

Polyester Filter Cartridge

Reliable filtration solution for general industrial dust applications.

MATERIAL

Polyester Fiber

DIAMETER

Ø325 mm / Ø350 mm

FILTRATION EFFICIENCY

⩾99%

AZURE

AZURE ERA / FILTRATION COMPONENTS

FILTER CARTRIDGE

TECHNICAL SPECIFICATIONS

Flame Retardant Filter Cartridge

Designed for spark and combustible dust applications.

MATERIAL

Acrylic Fiber / Flame Retardant Media

DIAMETER

Ø325 mm / Ø350 mm / Ø380 mm

LENGTH

500 / 550 / 600 mm

Antistatic Filter Cartridge

Reduces static electricity buildup during filtration for safer operation.

MATERIAL

Antistatic Polyester Fiber

SURFACE RESISTANCE

$\leqslant 10^6\ \Omega$

LENGTH

500 / 550 / 600 mm

AIR COLLECTION COMPONENTS

Complete ducting solutions for customized dust extraction systems



Available in various diameters and configurations according to different system requirements.

AZURE ERA / PRODUCT SERIES

DUCTWORK OPTIONS

Available diameters and configurations for different extraction systems.

MATERIAL

Galvanized Steel / Stainless Steel

DIAMETER

Ø100 – Ø500 mm

COMPONENTS

Duct · Elbow · Tee · Flange